




## CAT5E CABLE



**09271P-57:** Standard UTP Ethernet cable, 350MHz, 4 bonded pair, 24 AWG, 0.2 inch O.D., polyolefin insulation, PVC outer jacket. Storage temp: -20° to +75°C. Install temp: 0° to +60°C. Operating temp: -20° to +60°C.

**09271P-58:** Industrial Ethernet cable, 200 MHz, 4 bonded pair, 24 AWG, 0.265 inch O.D., aluminum foil-polyester tape outer shield (100%), polyolefin insulation, industrial grade PVC outer jacket. Storage temp: -40° to +80°C. Install temp: -25° to +75°C. Operating temp: -40° to +75°C.

## RJ-45 CONNECTORS

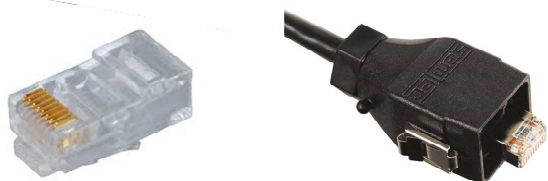

**13104P-09 (10/pk):** Standard Ethernet plug, 8 conductor, 24 AWG cable compatible

**13199P-66:** IP-68 sealed Ethernet plug (field termination kit), 24 AWG cable compatible, dual-latch mates to IP-68 sealed jack on Series 9100 network endpoints.

## C91-20PW



**40892G-19 Power Cable Assembly:** 20 foot length, 3 pin Conxall overmolded connector on one end (IP-68 sealed), prepared leads on other end. 2 conductor individually shielded cable, 14 AWG, PVC insulation, polyurethane outer jacket, 0.312 inch O.D.

## C91-20RD



**40892G-20: Radio Interface Cable Assembly:** 20 foot length, 6 pin JAE connector on one end (IP-68 sealed), prepared leads on other end. 6 conductor twisted pair shielded cable, 28 AWG, PVC insulation, polyurethane outer jacket, 0.188 inch O.D.

## C91-20AX



**40892G-21: Auxiliary Input/Output Cable Assembly:** 20 foot length, 4 pin JAE connector on one end (IP-68 sealed), 3.5mm plug on other end. 4 conductor twisted pair shielded cable, 28 AWG, PVC insulation, polyurethane outer jacket, 0.188 inch O.D. 3.5mm jack to dual-RCA plug adapter cord included.

**David Clark Company Incorporated**  
360 Franklin Street, Box 15054  
Worcester, MA 01615-0054  
Phone: 508-751-5800 Fax: 508-753-5827  
[www.davidclark.com](http://www.davidclark.com)